
Templates on 10' centers bulkheads 3/32" thick (9" at 1:96) except for center bulkheads which are 3/64

1" square bar T32 to TC 3/4" x 1" bar glued to top aft from T28 3/4" x 1" bar glued to top forward of TC and TG to aft of T32 dowels as shown to align blocks

use bulkheads to shape balsa blocks assemble hull onto keel & big bar with bulkheads separated by blocks of balsa bulkhead on rear of blocks forward of center on forward of blocks aft of center two center bulkheads one facing each way (fore & aft)

align with tubes & bars - hold center together with threaded rods

6mm stainless steel tubes with 8-32 stainless steel threaded rods

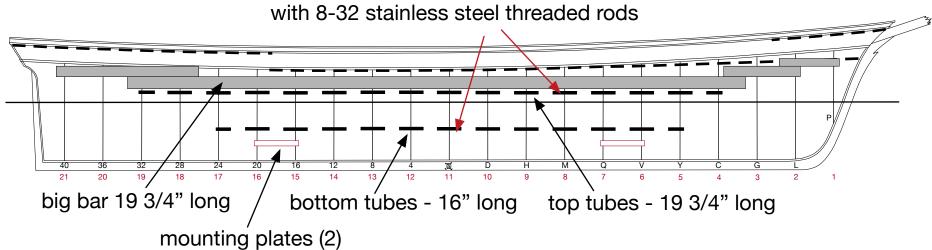

balsa filler